# UltraDrive GX2 Series

SATA-II 3Gbps SSD

### **SATA Solid State Drive**



The UltraDrive GX2 extreme performance SATA-II SSD uses an advanced new controller and 64MB DRAM cache to deliver exceptionally fast sequential read and write speeds. With no moving parts, the GX2 is lightweight, uses far less power and is much more resistant to shock and vibration than a hard disk drive.

JPER \* TALEN

The UltraDrive GX2 is also packed with all the latest performance and reliability features. ECC, wear leveling and bad bit management algorithms improve reliability and extend the life of the drive. The GX2 is available in capacities up to 512GB.

### Physical Specifications

Form Factor	2.5"
Capacity*	32GB - 512GB
Dimension	69.85 x 100.20 x 9.50 mm
SATA Interface	Serial ATA-II 3Gbps
NAND Flash	MLC
Cache	64MB DRAM Cache
Power Supply	5.0Vcc +/- 5%
Package	Metal housing

#### Environmental Specifications

Operating Shock	1500G
Operating Vibration	16G
Operating Temperature	0C to +70C
Operating Humidity	5 to 90%

#### Reliability Specifications

MTBF	1,000,000 hours
Data Reliability	Built-in EDC/ECC function
Data Integrity	10 years
Wear Leveling Algor.	Patent Pending

#### Performance Specifications

	Seq. Read	Seq. Write
Capacity	(MB/sec max)	(MB/sec max)
64GB	200	130
128GB	220	180
256GB	230	180
512GB	230	180

### **Ordering Information**

32GB	FTM32G225H
64GB	FTM64G225H
128GB	FTM28G225H
256GB	FTM56G225H
512GB	FTM12G225H

© 2009 Super Talent Technology. Specifications subject to change without notice. US patent # 6,547,130 and others apply. 1GB=1,000,000,000 Bytes. Usable capacity may be less than specified after formatting. Actual performance varies depending upon the system configuration and the application used. Performance is highly dependent upon test environment and use case. Consult our benchmarking data for more detailed performance information or benchmark performance in your environment.

## ssd.supertalent.com

# UltraDrive GX2 Series

## **SATA Solid State Drive**

**\*TALENT** 

MEMORY

**SATA Flash Drive Pin Assignment** 

### **Power Segment**

PIN	Signal Name	Description
P1	Not Used (3.3V)	N/A
P2	Not Used (3.3V)	N/A
P3	Not Used (3.3V Precharge)	
P4	GND	1 <sup>st</sup> mate
P5	GND	2 <sup>nd</sup> mate
P6	GND	
P7	5V Precharge	5V Power
P8	5V Precharge	5V Power
P9	5V Precharge	
P10	GND	
P11	Reserved	
P12	GND	1 <sup>st</sup> mate
P13	Not Used (12V Precharge)	N/A
P14	Not Used (12V)	
P15	Not Used (12V)	

### **Signal Segment**

PIN	Signal Name	Description
S1	GND	
S2	RxP	Differential Signal
S3	RxN	pair for Receive
S4	GND	
S5	TxN	Differential Signal
S6	TxP	pair for Transmit
S7	GND	

Revision History November 11, 2009 Rev-A Released first data sheet

© 2008 Super Talent Technology. Specifications subject to change without notice. US patent # 6,547,130 and others apply.


## www.supertalent.com

## UltraDrive GX2 Series

**SATA Solid State Drive** 

JPER \* TALENT

### **Mechanical Specifications**

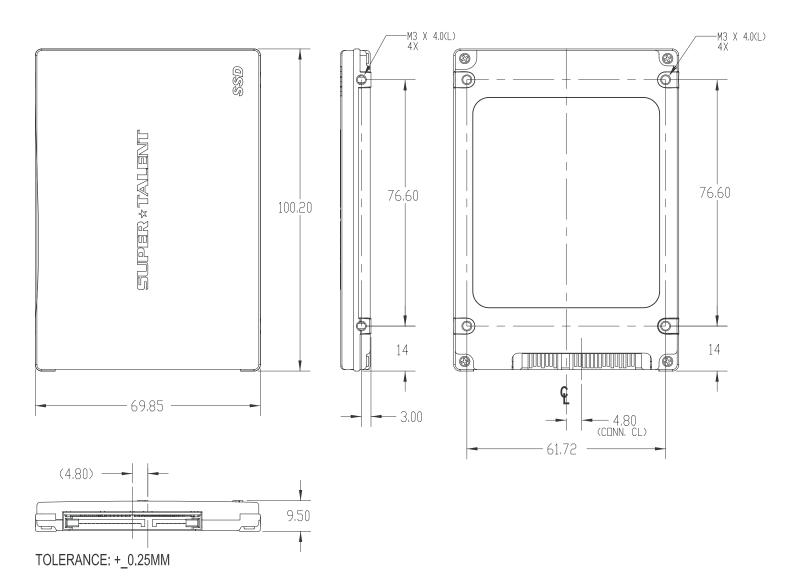

© 2009 Super Talent Technology. Specifications subject to change without notice. US patent # 6,547,130 and others apply.

# www.supertalent.com