SUPER * TALENT THE BEST MEMORY

3.5" SATA Solid State Drive

General Description

The SATA Flash Drive FSD16/32/64/28/56GC35M series is a Serial ATA interface solid state drive (SSD) that features a flash disk controller chip and NAND type flash memory devices. This 3.5 inch form factor SSD series is available in 16GB, 32GB, 64GB, 128GB, and 256GB capacities. The drive uses a 5-volt power supply and supports SATA data transfer. This SATA SSD Drive is geared specifically to military and industrial markets for use in such products as avionics, video on demand, ATM, factory automation machines, POS terminals, measuring products, ticket vending machines, parking systems and other industrial products that require high tolerance to environmental conditions.

Features

- Capacity: 16GB to 256GB

- Form factor: 3.5 inch type (HDD compatible)

- SATA interface: Serial ATA command set compatible

- Power supply: Vcc=5.0V +/-5%

- Operating temperature: Commercial: 0C to +70C

- Performance:

Sequential Read Rate: 65MB/sec (max)
Sequential Write Rate: 50MB/sec (max)
Sequential Read IOPS: 58,675 IOPS
Access Time: 0.1ms

Shock: 1500G (operating)Vibration: 16G (operating)

Specifications

- Compatibility: Full SATA hard disk compatible

- OS Support: All

- Package: Complete metal housing

- Reliability:

MTBF: >1,000,000 hours

Data reliability: Built-in EDC/ECC function Patent pending Wear-leveling algorithms

- Endurance:

Read: Unlimited

Write/Erase: >140 years @ 50GB write-erase /day



Designed and Manufactured in USA

Ordering Information

Capacity	Model No.	
16GB	FSD16GC35M	
32GB	FSD32GC35M	
64GB	FSD64GC35M	
128GB	FSD28GC35M	
256GB	FSD56GC35M	

© 2007 Super Talent Technology. Specifications subject to change without notice. US patent # 6,547,130 and others apply.



3.5" SATA Solid State Drive

SATA Flash Drive Pin Assignment

Signal Segment

Pin	Signal Name	Description
S1	GND	
S2	RxP	Differential Signal
S3	RxN	Pair for Receive
S4	GND	
S5	TxN	Differential Signal
S6	TxP	Pair for Receive
S7	GND	

Power Segment

Pin	Signal Name	Description
P1	Not Used (3.3V)	N/A
P2	Not Used (3.3V)	N/A
P3	Not Used (3.3V Precharge)	
P4	GND	1st mate
P5	GND	2nd mate
P6	GND	
P7	5V Precharge	5V Power
P8	5V Precharge	5V Power
P9	5V Precharge	
P10	GND	
P11	Reserved	
P12	GND	1st mate
P13	Not Used (12V Precharge)	N/A
P14	Not Used (12V)	
P15	Not Used (12V)	

Revision History

Aug 17, 2007 Rev-A Preliminary Product Specification Released Nov 16, 2007 Rev-B Added 256GB March 21, 2008 Rev-C Revised Photo


© 2007 Super Talent Technology. Specifications subject to change without notice. US patent # 6,547,130 and others apply.



3.5" SATA Solid State Drive

Mechanical Specification



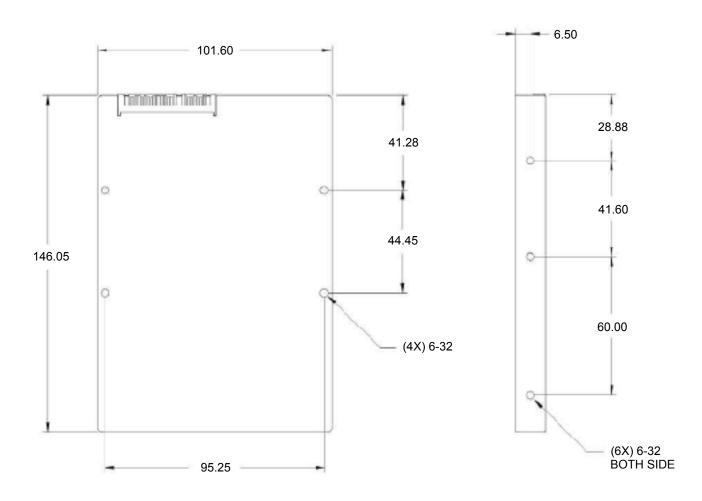

© 2007 Super Talent Technology. Specifications subject to change without notice. US patent # 6,547,130 and others apply.